



GRÖNE

Rzemieślnicza 14
62-081 Baranowo

www.grone.pl



GRÖNE



PICTOGRAMS

GRÖNE

STRONG AVAILABLE PARTS FAST REACTION WAREHOUSE CONSULTING EFFICIENT CRAFTSMEN

WARRANTY SERVICE TRAINING

SOLID ACHIEVABLE RELIABLE

COM-PETENCE KNOWLEDGE COMPETENCE PROFESSIONALISM

left / right switch	ALU	quick assembly	high impact power	increased torque	LED lighting
soft start system	light alloy gearbox casing	collapsible frame	detachable pump	detachable peripheral brush for corner work	exhaust mode
socket for external tool connection	MAX 2000W!	MAX 2200W!	velcro mounting for sanding sheets	32 mm	reusable filter
universal joint adjustable head	double spindle	M14 spindle	helical gear	forged drive shaft elements	
two work stations	125-170 cm range of pole regulation	telescopic pole	overload protection	heating temperature regulation	overvoltage protection
stepless position adjustment	PRCD switch	4-pole motor	brushless motor	ball bearing drive shafts	easy transport
impact drilling	electric impact	chiselling	self-diagnostic capability	accessories container	
keyless chuck	keyed chuck	SDS Plus	mechanical impact	non-impact drilling	non-impact chuck drilling option
metric ruler	angle bracket	speed regulation	dead man's switch	automatic filter cleaning system	increased gasket life
for painting and skimming	for wet work	for dry work	high capacity battery	Li-Ion battery	plunge cutting head
for painting	improved ergonomics	belt clip	hermetic electric motor	guide bar with bearings	ALU
MAX 25 mm	MAX 40 mm	MAX 60 mm	MAX 45°	MAX 17 mm	MAX 25 mm
MAX 48 mm	maximum cutting depth		maximum cutting angle		maximum cutting depth at an angle
MAX 600 mm	MAX 750 mm	MAX 1000 mm	MAX 1250 mm	safety clutch?	
maximum work piece length					

We deliver durable machines

with good technical parameters for all craftsmen, specialists and providers working within building and renovation industry. At Gröne our aim is to provide our Clients on Polish and Eastern European markets with access to technically functional, infallible power tools and painting units.

We support our Clients

with quality, assortment tailored to their needs, professional service and perfect mentoring.

Check out our offer

presented in this catalogue. Should you have any doubts, we will gladly answer all of your questions.

GRÖNE

Building, renovation and interior finishing machines have been divided into groups accordingly to each stage of house building.

-  installations 
-  walls and floors 
-  elevations 
-  interior finishing 

A convenient colour code system for easier navigation.



installations



walls and floors



elevations



interior finishing



Each machine has been marked with
a main colour marker

Each colour marks a different stage of house building
and tools required at the stage



INSTALLATIONS

Do you plan on electric, hydraulic, gas or safety system installation? Take a closer look at Gröne handy and durable angle grinder lines and our powerful hammer drills.


HAMMER DRILL GHMV 2695-3 2506-310950

SCOPE OF DELIVERY

3J hammer drill, PVC tool case, auxiliary handle with depth gauge rod lock, SDS Plus keyed chuck with a key, set of SDS Plus equipment: shank, flat chisel, drill bits: 12, 14 and 16 mm, manual, product warranty, brush set.

PRODUCT ADVANTAGES

- 3J Electro-pneumatic hammering – high productivity.
- 3 operation modes: rotation-only, rotary hammer and hammer only – flexible for variety of applications.
- Keyed chuck for high power non-impact rotary drilling.
- Light-alloy gearbox casing – high mechanical durability and heat dissipation.
- Motor elements mounted with bearings – high durability.
- Big working mode switch – easy to use in builders gloves.
- High power motor – power reserve for hard work without an impact on tool life.
- Forged hammer mechanism elements – high load capacity, also for highly intense work.

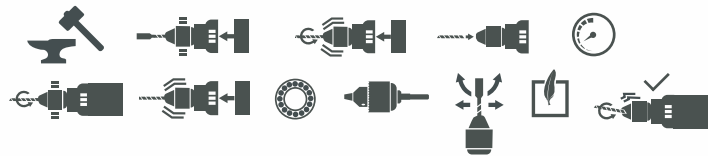

SPECIFICATIONS

Operating voltage	230 V
Power	950 W
RPM	0-1100
Impact frequency	5000/min
Impact energy	3 J
Max. concrete drilling diameter	26 mm
Weight	4 kg


HAMMER DRILL GHDV 3295-7 STDG 2506-360950

SCOPE OF DELIVERY

7 J hammer drill, PVC tool case, auxiliary handle with a depth gauge rod lock, set of SDS Plus equipment: shank, flat chisel, drill bits : 10, 12 and 22 mm, manual, product warranty, brush set.

PRODUCT ADVANTAGES

- 7 J electro-pneumatic hammering – high work productivity.
- Rotation regulation – adjustment of tool operation to work piece parameters.
- Vibration damper – longer and safer run-time, increased work time productivity.
- Drive transfer in gears – more durable machine even in the hardest works.
- Light-alloy gearbox casing – high mechanical durability and heat dissipation.
- Motor elements in bearings – high usage durability.
- Big working mode switch – easy to use in builders gloves.
- High power motor – power reserve for hard work without an impact on tool life.

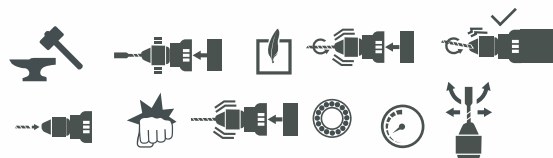

SPECIFICATIONS

Operating voltage	230 V
Power	950 W
RPM	375-750
Impact frequency	4380/min
Impact energy	7 J
Max. concrete drilling diameter	32 mm
Weight	7 kg

ANGLE GRINDER GAGV 8-125 2524-820850

SCOPE OF DELIVERY

Angle grinder, PVC tool case, auxiliary handle, pin spanner wrench, brush set, manual, product warranty.

PRODUCTS ADVANTAGES

- Rotation regulation – adjustment of tool operation to various materials.
- Helical gear – quieter work under heavier load.
- Small & ergonomic – comfortable and less tiresome work.
- Light alloy gearbox housing – higher durability and better heat dissipation.
- Drive shaft on ball bearings – higher durability under bigger load.



SPECIFICATIONS

Operating voltage	230 V
Power	850 W
Operating tool diameter	125 mm
Variable speed	6600-11 000 obr./min
Spindle thread	M14
Weight	1,9 kg

ANGLE GRINDER GAGV 10-125 2524-841050

SCOPE OF DELIVERY

Angle grinder, PVC tool case, auxiliary handle, pin spanner wrench, brush set, manual, product warranty.

PRODUCT ADVANTAGES

- Perfect ergonomics – rat-tail handle for sure grip and safer machine operation.
- Rotation regulation – adjustment of tool operation to various materials.
- Helical gear – quieter work under bigger load.
- Light alloy gearbox casing – higher durability and better heat dissipation.
- Drive shaft on ball bearings – higher durability under bigger load.
- Electronic motor overload protection and soft start system – enhanced safety and increased tool life.



SPECIFICATIONS

Operating voltage	230 V
Power	1050 W
Operating tool diameter	125 mm
Variable speed	2400-12 000 obr./min
Spindle thread	M14
Weight	2,4 kg

ANGLE GRINDER GAG 22-230 HT 2524-862200

COPE OF DELIVERY

Angle grinder, PVC tool case, auxiliary handle, pin spanner wrench, brush set, manual, product warranty.

PRODUCT ADVANTAGES

- Perfect ergonomics – rat-tail handle for sure grip and safer machine operation.
- High torque – increased torque compared to other machines available on the market for improved load capacity and better grinding work effects.
- Helical gear – quieter work under bigger load.
- Light alloy gearbox casing – higher durability and better heat dissipation.
- Drive shaft on ball bearings – higher durability under bigger load.
- Electronic motor overload protection and soft start system – enhanced safety and increased tool life.



SPECIFICATIONS

Operating voltage	230 V
Power	2200 W
Operating tool diameter	230 mm
Variable speed	5800 osc./min
Spindle thread	M14
Weight	6,4 kg

Check!

Battery-powered angle grinder is available in *Interior finishing* section on page 36.

**Concrete hammer drill bits with SDS Plus chuck, two cutter, four spiral:
concrete hammer drilling for reinforced concrete and natural stone works.**

Durable core material relocates the impact power and is resistant to forces resulting from the work. Additional third and fourth spiral prevents the drill bit from breaking and helps transferring the impact force more efficiently. Two-cutter head for quick debris disposal.



INDEX NUMBER	EAN	Chuck	Diameter	Operating length	Total length
2204-506160	5905061070144	SDS Plus	6 mm	95 mm	160 mm
2204-506210	5905061070151	SDS Plus	6 mm	140 mm	210 mm
2204-508160	5905061070168	SDS Plus	8 mm	95 mm	160 mm
2204-508210	5905061070175	SDS Plus	8 mm	140 mm	210 mm
2204-510160	5905061070182	SDS Plus	10 mm	95 mm	160 mm
2204-510210	5905061070199	SDS Plus	10 mm	140 mm	210 mm
2204-510260	5905061070205	SDS Plus	10 mm	185 mm	260 mm
2204-512160	5905061070212	SDS Plus	12 mm	95 mm	160 mm
2204-512210	5905061070229	SDS Plus	12 mm	140 mm	210 mm
2204-512260	5905061070236	SDS Plus	12 mm	185 mm	260 mm
2204-512310	5905061070243	SDS Plus	12 mm	230 mm	310 mm
2204-514210	5905061070250	SDS Plus	14 mm	95 mm	160 mm
2204-514260	5905061070267	SDS Plus	14 mm	185 mm	260 mm



**Hammer concrete drill bits with SDS Plus chuck, four cutter, four spiral:
hammer drilling in concrete for reinforced concrete and natural stone works**

Durable core material relocates the impact power and is resistant to forces resulting from the work. Additional third and fourth spiral prevents the drill bit from breaking and helps transferring the impact force more efficiently. Four cutter head is resistant to the force generated in the contact with reinforcement



INDEX NUMBER	EAN	Chuck	Diameter	Operating length	Total length
2204-606160	5905061069889	SDS Plus	6 mm	95 mm	160 mm
2204-606210	5905061069896	SDS Plus	6 mm	140 mm	210 mm
2204-608160	5905061069902	SDS Plus	8 mm	95 mm	160 mm
2204-608210	5905061069919	SDS Plus	8 mm	140 mm	210 mm
2204-610160	5905061069926	SDS Plus	10 mm	95 mm	160 mm
2204-610210	5905061069933	SDS Plus	10 mm	140 mm	210 mm
2204-610260	5905061069940	SDS Plus	10 mm	185 mm	260 mm
2204-610310	5905061069957	SDS Plus	10 mm	230 mm	310 mm
2204-612160	5905061069964	SDS Plus	12 mm	95 mm	160 mm
2204-612210	5905061069971	SDS Plus	12 mm	140 mm	210 mm
2204-612260	5905061069988	SDS Plus	12 mm	185 mm	260 mm
2204-612310	5905061069995	SDS Plus	12 mm	230 mm	310 mm
2204-614210	5905061070007	SDS Plus	14 mm	95 mm	210 mm
2204-614260	5905061070014	SDS Plus	14 mm	140 mm	260 mm
2204-614310	5905061070021	SDS Plus	14 mm	185 mm	310 mm
2204-616260	5905061070038	SDS Plus	16 mm	185 mm	260 mm
2204-616310	5905061070045	SDS Plus	16 mm	210 mm	310 mm
2204-616400	5905061070052	SDS Plus	16 mm	310 mm	400 mm
2204-618300	5905061070069	SDS Plus	18 mm	210 mm	300 mm
2204-618400	5905061070076	SDS Plus	18 mm	310 mm	400 mm
2204-618500	5905061070083	SDS Plus	18 mm	410 mm	500 mm
2204-620300	5905061070090	SDS Plus	20 mm	240 mm	300 mm
2204-620400	5905061070106	SDS Plus	20 mm	310 mm	400 mm
2204-620500	5905061070113	SDS Plus	20 mm	410 mm	500 mm
2204-620600	5905061070120	SDS Plus	20 mm	400 mm	600 mm
2204-620800	5905061070137	SDS Plus	20 mm	700 mm	800 mm



**Crown drill bits for concrete with Tungsten carbides, pilot drill bit and SDS Plus adapter:
rilling large diameter holes in concrete and other hard construction materials**

Durable steel body ensures long tool life and low vibration transmission. Blades from Tungsten carbides remain sharp for long, ensuring continuous fast progress of drilling works. The crown features a SDS Plus adapter and a pilot drill bit and is ready to work!



INDEX NUMBER	EAN	Diameter	Operating length	Total length
2204-800068	5905061070335	68 mm	56 mm	72 mm
2204-800080	5905061070342	80 mm	56 mm	72 mm

**Crown drill bits for concrete with Tungsten carbides:
drilling large diameter holes in concrete and other hard construction materials**

Durable steel body ensures long tool life and low vibration transmission. Blades from Tungsten carbides remain sharp for long, ensuring continuous fast progress of drilling works.



INDEX NUMBER	EAN	Diameter	Operating length	Total length
2204-810045	5905061070359	45 mm	56 mm	72 mm
2204-810068	5905061070366	68 mm	56 mm	72 mm
2204-810080	5905061070373	80 mm	56 mm	72 mm

SDS Plus Adapter for crown tips with a pilot drill bit

High quality steel for long tool life.



INDEX NUMBER	EAN	Diameter	Operating length	Total length
2204-820110	5905061070380	8 mm	65 mm	110 mm

Pilot drill bit for crown tips

High quality steel for long tool life.



INDEX NUMBER	EAN	Diameter	Operating length	Total length
2204-820111	5905061070397	8 mm	65 mm	110 mm

Crown tips set with adapter and a pilot drill bit

A must-have set for every system installer – two most common diameters of crown tips for drilling holes under cable boxes.



INDEX NUMBER	EAN	Diameter	Length	Total length
2204-896580	5905061070311	68 mm oraz 80 mm	65 mm	110 mm

10 drill bits and SDS Plus chisels set in aluminium tool case

A set of most common four spiral, four cutter SDS Plus drill bits diameters and lengths – a must-have for every builder.



INDEX NUMBER	EAN	Chuck	Diameter	Total length
2204-900010	5905061070304	SDS Plus	5, 6, 8, 10, 14, 16, 18, 20 mm	160, 210, 450 mm

Chisels with SDS Plus chuck: Chiselling and hammering in all construction materials

Quality finish material is a guarantee of Gröne chisels long tool life and work productivity.



INDEX NUMBER	EAN	Chuck	Width	Total length
2204-702500	5905061070274	SDS Plus		250 mm
2204-712525	5905061070281	SDS Plus	25 mm	250 mm
2204-712540	5905061070298	SDS Plus	40 mm	250 mm

Corundum saw blades for cutting steel

High hardness and effectiveness are a guarantee of long tool life. They are also characterised by a high rate of debris removal.



INDEX NUMBER	EAN	Spindle hole	Diameter	Thickness	Type	Abrasive
1070-140112	5905061069148	22,23 mm	125 mm	1,0 mm	41	high-grade corundum
1070-140212	5905061069155	22,23 mm	125 mm	1,6 mm	41	high-grade corundum
1070-140223	5905061069162	22,23 mm	230 mm	1,8 mm	41	high-grade corundum
1070-150312	5905061069179	22,23 mm	125 mm	3,0 mm	42	high-grade corundum
1070-150323	5905061069186	22,23 mm	230 mm	3,0 mm	42	high-grade corundum

Corundum saw blades for stainless steel

High hardness and effectiveness are a guarantee of long tool life. They are also characterised by a high rate of debris removal. Trace amounts of sulphur, iron and chlorine make the blade suitable for stainless and acidproof steel works.



INDEX NUMBER	EAN	Spindle hole	Diameter	Thickness	Type	Abrasive
1070-160112	5905061069193	22,23 mm	125 mm	1,0 mm	41	high-grade corundum

Corundum grinding wheels for steel

High hardness and effectiveness are a guarantee of long tool life. They are also characterised by a high rate of debris removal.



INDEX NUMBER	EAN	Spindle hole	Diameter	Thickness	Type	Abrasive
1070-240712	5905061069209	22,23 mm	125 mm	7,0 mm	27	high-grade corundum
1070-240723	5905061069216	22,23 mm	230 mm	7,0 mm	27	high-grade corundum

Semi-flexible grinding wheels with profiled abrasive: for marble, granite, terrazzo, concrete, ceramics, glass, cast iron grinding and hull cleaning.

Highly durable fibre supporting abrasive wheel, profiled carborundum abrasive for fast work progress in various difficult materials, does not gum up.



INDEX NUMBER	EAN	Spindle hole	Diameter	Paper weight	Type	Abrasive
1070-341324	5905061069223	22,23 mm	125 mm	P24	flat	carborundum
1070-341336	5905061069230	22,23 mm	125 mm	P36	flat	carborundum
1070-341360	5905061069247	22,23 mm	125 mm	P60	flat	carborundum
1070-341380	5905061069254	22,23 mm	125 mm	P80	flat	carborundum

Finned bend abrasive with corundum coat: for steel, aluminium, stainless steel sanding, steel, aluminium, wood, pvc surface conditioning, burring and bevelling, paint and rust removal, grinding welds after fusion welding.

High density of flaps and stable base of sanding grain are a guarantee of long life. The wheel was made of fiberglass for high load capacity. Cool grinding provides uniform grinding result.



INDEX NUMBER	EAN	Spindle hole	Diameter	Paper weight	Type	Abrasive
1070-401340	5905061069261	22,23 mm	125 mm	P40	slanted	corundum
1070-401360	5905061069278	22,23 mm	125 mm	P60	slanted	corundum
1070-401380	5905061069285	22,23 mm	125 mm	P80	slanted	corundum

Finned bend abrasive with zirconium-corundum coat:
for steel, aluminium, stainless steel sanding, steel, aluminium, wood, pvc surface conditioning, burring and bevelling,
paint and rust removal, grinding welds after fusion welding.

High density of flaps and stable base of sanding grain are a guarantee of long life. The wheel was made of fibreglass for high load capacity.
Cool grinding gives uniform grinding result.



INDEX NUMBER	EAN	Spindle hole	Diameter	Grit size	Type	Abrasive
1070-411340	5905061069292	22,23 mm	125 mm	P40	skew	zirconium-corundum
1070-411360	5905061069308	22,23 mm	125 mm	P60	skew	zirconium-corundum
1070-411380	5905061069315	22,23 mm	125 mm	P80	skew	zirconium-corundum

Abrasive non-woven disc:
surface finishing, old paint removal

A flexible tool for high quality finishing sanding.
Grain selection and fibre hardness guarantee long blade life.



INDEX NUMBER	EAN	Spindle hole	Diameter	Grit size	Type	Abrasive
1070-501300	5905061070854	22,23 mm	127 mm	medium	flat	non-woven fabric





WALLS AND FLOORS

Have you finished system installations? Time for floor casting and plastering. There are a few techniques and materials required for these tasks. It's a good idea to plan ahead before starting your work and decide which tools will be necessary for this stage. Walls and floors are a basic category for: instrumentation, tile saws, concrete milling machines and an industrial vacuum cleaner.

TILE SAW GTTS 8-600

PRODUCT ADVANTAGES

- Standard table tile saw for a reasonable price.
- Great weight to power ratio. Possibility of cutting elements of edge length up to 60 cm.
- Solid, stable tables - stability of set parameters, final effect repeatability.
- Durable high power motors – also for highly intensive work.
- Aluminium saw guide bars in bearings – stability of set parameters, wear and corrosion resistance.
- Ruler and angle bracket for precise cutting parameters setting.
- Water pump with suction regulation – possibility of water flow adjustment to the work piece material and diamond blade characteristics.




INDEX NUMBER	Description	Rated output	Rated output parameters	Maximum idling rotational speed	Grinding wheel diameter	Spindle diameter	Maximum cut length	Maximum cut thickness 90° degrees	Maximum cut thickness 45° degrees	Working table measurements	Working head degree regulation range	Gros/net machine weight	Protection class
2536-840600	GTTS 8-600	800 W	230 V/50 Hz	2800	200 mm	25,4 mm	600 mm	40 mm	25 mm	695 x 403 mm	45°-90°	32/36 kg	IP 54

TILE SAW SERIES GTTS 15

PRODUCT ADVANTAGES

- Long working tables – possibility of cutting big and very big decorative elements.
- Solid, stable tables – stability of set parameters, final effect repeatability.
- Durable high power motors – also for highly intensive work.
- Aluminium saw guide bars in bearings – stability of set parameters, wear and corrosion resistance.
- Ruler and angle bracket for precise cutting parameters setting.
- Cutting head with deepening function.
- Water pump with suction regulation – possibility of water flow adjustment to work piece material and diamond blade characteristics.

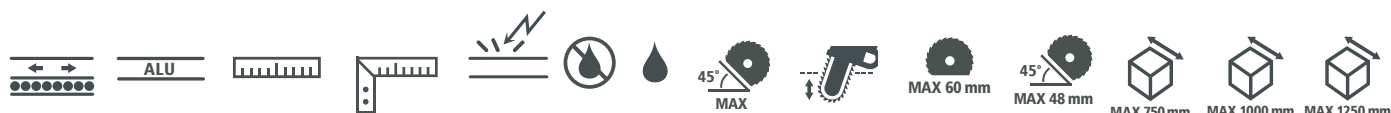

INDEX NUMBER	Description	Rated output	Rated output parameters	Maximum idling rotational speed	Grinding wheel diameter	Spindle diameter	Maximum cut length	Maximum cut thickness 90° degrees	Maximum cut thickness 45° degrees	Working table measurements	Working head degree regulation range	Gros/net machine weight	Protection class
2536-860750	GTTS 15-750	1500 W	230 V/50 Hz	2950	250 mm	25,4 mm	750 mm	60 mm	48 mm	890 x 503 mm	45°-90°	58/63 kg	IP 54
2536-861000	GTTS 15-1000	1500 W	230 V/50 Hz	2950	250 mm	25,4 mm	1000 mm	60 mm	48 mm	1190 x 503 mm	45°-90°	63/70 kg	IP 54
2536-861250	GTTS 15-1250	1500 W	230 V/50 Hz	2950	250 mm	25,4 mm	1250 mm	60 mm	48 mm	1440 x 503 mm	45°-90°	70/73 kg	IP 54

PORTABLE TILE SAW GTTPS 6-500 2536-920500

PRODUCT ADVANTAGES

- Aluminium working table – reduced machine weight, increased corrosion resistance.
- Durable high power motors – also for highly intensive work.
- Aluminium saw guide bars in bearings – stability of set parameters, wear and corrosion resistance.
- Ruler and angle bracket for precise cutting parameters setting.
- Easily detachable water tank – easy usage and cleaning.



SPECIFICATIONS

Operating voltage	230 V
Power	600 W
Operating tool diameter	180 mm
Working table measurements	682 x 385 mm
Cutting depth 90°/45°	28/20 mm
Spindle thread	22,2 mm
Weight	24 kg

CONCRETE MILLING MACHINE GFG 12-125 FR 2530-421200

COPE OF DELIVERY

Machine, tool case, auxiliary side handle, auxiliary front handle, vacuum cleaner adapter plug, milling wheel with cutters, wrenches for operating tool change, manual and product warranty.

PRODUCT ADVANTAGES

- High quality drive elements bearing system – long life and durability under highest load.
- Additional spindle seal with simerring – increased tightness and resistance to dust generated at work.
- Defond switch – renowned quality switches, increased tool life.
- Also for work with mills and diamond straight wheels – wider range of application.
- Optional handle for work in an upright position – enhanced work ergonomics on large surfaces



SPECIFICATIONS

Operating voltage	230 V
Power	1200 W
Grinding tool measurements	125 mm
Maximum milling depth	6 mm
Weight	5,4 kg

Star milling cutters set for GFG 12-125:
concrete, terrazzo, epoxy, polyurethane floors and other

Durable and resistant star milling cutters for optimum grinding works progress and low wear.



INDEX NUMBER	EAN	Diameter	Set Pieces	Material
2531-420001	5905061072841	25 mm	15	TC

Take a closer look at available equipment at the end of *Walls and floors* section.

Adapter for GFG 12-125 for diamond straight wheel assembly

Adapter with a wrench for diamond straight wheel usage in 22-23 mm standard with GFG 12-125 machine.

Enables work with GFG 12-125 machine with the most commonly used grinding equipment for difficult work – diamond straight wheels.



INDEX NUMBER	EAN
2531-420003	5905061072858

Handle for work in upright position with GFG 12-125

For work in an upright position which reduces operator fatigue while working on large vertical surfaces.



INDEX NUMBER	EAN
2531-420002	5905061072858

HAND-HELD STONE SAW GTS 18-180 2536-481680

COPE OF DELIVERY

Saw with casing, cutting depth regulation, PRCD switch, brush set, manual and product warranty, hose quick couplings set, PVC tool case, hex-wrench.

PRODUCT ADVANTAGES

- High quality drive elements bearing system – long tool life and durability under highest load.
- High quality motor ventilation system – longer life, quieter work, better cooling.
- Wet grinding – reduced dusting, longer diamond wheel life, smaller risk of diamond tool damage, cleaner cut.
- PRCD switch – increased safety of wet grinding.
- Guide bar work option – clean straight cuts even on long distances.
- Slow start – improved safety, smaller load to the electrical system.



SPECIFICATIONS

Operating voltage	230 V
Power	1800 W
Maximum cutting depth	55 mm
RPM	5800 rev./min
Max. operating tool diameter	180 mm
Weight	6,7 kg
Spindle	22,23 mm

80 cm aluminium guide bar for GTS 18-180

Small, compact guide bar supporting straight-line work in small areas, on large surfaces. You can connect guide bars infinitely with a connector.



INDEX NUMBER	EAN	Length
2537-480001	5905061072803	80 cm

140 cm aluminium guide bar for GTS 18-180

For support of straight-work line on large surfaces.

Long guide bar for straight-line cutting. You can connect guide bars infinitely with a connector.



INDEX NUMBER	EAN	Length
2537-480002	5905061072810	140 cm

Aluminium guide bar connector for GTS 18-180

For connecting aluminium guide bars for GTS 18-180 and assembling one guide bar. A simple element which does not require complicated intervention – even unexperienced users won't have any problems with assembly.



INDEX NUMBER	EAN
2537-480003	5905061072827

Aluminium guide bar clamp for GTS 18-180

Easy assembly, durable, aluminium clump for stiff assembly of guide bar with a material.



INDEX NUMBER	EAN
2537-480004	5905061072834



INDUSTRIAL VACUUM CLEANER GVC 10-15-35 2556-900015

COPE OF DELIVERY

Vacuum cleaner, hose, power cord, manual and product warranty, nozzle set: wide, narrow, brush, narrow and wide for water collection, cardboard box.









PRODUCT ADVANTAGES

- Industrial vacuum cleaner for dry and wet work, for e.g. removal of dust, liquid and other stains characteristic for construction site.
- High suction power in compact measurements of the machine.
- Possibility of power tool connection of power up to 2000 W.
- Work without adapters with equipment in 35 mm system.
- High quality reusable filter for easier tank emptying.
- Long cable – greater machine range.
- Motor silencing mats – quieter, safer work for operator.



SPECIFICATIONS

Operating voltage	230 V
Power	1000 W
Maximum load of auxiliary socket	2000 W
Elevated vacuum	200 mbar
Airflow	48 l/s
Hose connection diameter	35 mm
Protection class	IP X4
Weight	10,4 kg
Net capacity	15 l

INDEX NUMBER	Product name	EAN	Full product name	Purpose	Feature/benefit	Diameter
	2557-900001 HS90 Water suction nozzle for GVC 10-15-35	5905061072971	Water suction nozzle for GVC 10-15-35	Suction nozzle with 35 mm connection for water suction	Easy and comfortable water collection	35 mm
	2557-900002 GVC 10-15-35 Dust suction nozzle	5905061072988	Dust suction nozzle for GVC 10-15-35	Suction nozzle with 35 mm connection for dust removal	Quick and efficient dust removal	35 mm
	2557-900003 GVC 10-15-35 Upholstery suction nozzle	5905061072995	Upholstery suction nozzle for GVC 10-15-35	Suction nozzle with 35 mm connection for upholstery work	Comfortable work with upholsteries on all surfaces and in all corners	35 mm
	2557-900004 GVC 10-15-35 plastic suction nozzle	5905061073008	Plastic suction nozzle for GVC 10-15-35	Plastic suction nozzle with 35 mm connection for general purpose for general purpose	Effective general purpose nozzle	35 mm
	2557-900005 GVC 10-15-35 Slit suction nozzle	5905061073015	Slit suction nozzle for GVC 10-15-35	Slit suction nozzle with 35 mm connection for work in hard to reach areas	Easy work in hard to access areas	35 mm
	2557-900006 GVC 10-15-35 Telescopic pipe	5905061073022	Telescopic pipe for GVC 10-15-35, Ø35 mm	Pipe with 35 mm connection diameter for assembly between the hose and suction nozzles	Telescopic pipe which can be easily adjusted to operator's height	35 mm
	2557-900007 GVC 10-15-35 Polyester hood	5905061073039	Polyester filter for GVC 10-15-35, replaceable	Reusable polyester hood filter for use with GVC 10-15-35	Reusable filter, can be washed and brushed. For dry and wet work. Easy disassembly.	35 mm
	2557-900008 250 cm hose for GVC 10-15-35	5905061073046	2,5 m hose, Ø35 mm for GVC 10-15-35	Vacuum cleaner hose for 35 mm system vacuum cleaners	Suitable for all 35 mm system vacuum cleaners with nozzles	35 mm

Take a closer look at available equipment at the end of *Walls and floors* section.

RANGEFINDER CJ-40

2666-200040

PRODUCT ADVANTAGES

- High measurement precision.
- For inside and outside work.
- Wide range of work temperature: from -10°C to 50°C.
- Possible measurements in different measurement systems: inches, feet, metres.
- 20 measurements memory storage.
- Pythagoras' function.



ANGLE LASER BX25

2668-140290

PRODUCT ADVANTAGES

- Emits two perpendicular laser beams.
- Perfect for glazing works and wooden floors instalations.
- Two built-in spirit levels.



Diamond wheels for hard materials such as glaze, terracotta, ceramics and tiles, natural stone.

Continuous edge

Weld hardness has been suitably selected for hard ceramics works, continuous edge for increased cutting precision, high quality diamond grain guarantees fast work and long life.



INDEX NUMBER	EAN	Diameter	Spindle hole	Mode of segment connection	Edge Typee	Segment height	Segment width	Weld hardness	Application
2280-120125	5905061073152	125 mm	22,23 mm	induction welded	continuous	10 mm	1,8 mm	soft	dry / wet
2280-120230	5905061073169	230 mm	22,23 mm	induction welded	continuous	10 mm	1,8 mm	soft	dry / wet
2282-130178	5905061077976	180 mm	22,23 mm	induction welded	continuous	10 mm	1,8 mm	soft	dry / wet
2282-130180	5905061073251	180 mm	25,4 mm	induction welded	continuous	10 mm	1,8 mm	soft	dry / wet
2282-130200	5905061073268	200 mm	25,4 mm	induction welded	continuous	10 mm	1,8 mm	soft	dry / wet
2282-130250	5905061073275	250 mm	25,4 mm	induction welded	continuous	10 mm	1,8 mm	soft	dry / wet

Turbo slanted edge

Weld hardness has been suitably selected for hard ceramics works, turbo edge for increased working speed, high quality diamond grain guarantees fast work and long life, body with cooling vents improves wheel life.



INDEX NUMBER	EAN	Diameter	Spindle hole	Mode of segment connection	Edge Typee	Segment height	Segment width	Weld hardness	Purpose
2280-140125	5905061073176	125 mm	22,23 mm	induction welded	turbo slanted	7 mm	1,5 mm	soft	dry / wet
2280-140180	5905061077969	180 mm	22,23 mm	induction welded	turbo slanted	7 mm	1,5 mm	soft	dry / wet
2280-140230	5905061073183	230 mm	22,23 mm	induction welded	turbo slanted	7 mm	1,5 mm	soft	dry / wet

Corrugated, continuous edge

Weld hardness has been suitably selected for hard ceramics works, corrugated edge provides fast work progress with an elegant edge finishing, high quality diamond grain guarantees fast work and long life, body with cooling vents improves wheel life.



INDEX NUMBER	EAN	Diameter	Spindle hole	Mode of segment connection	Edge Typee	Segment height	Segment width	Weld hardness	Purpose
2280-160125	5905061073305	125 mm	22,23 mm	induction welded	corrugated, continuous	10 mm	1,8 mm	soft	dry/wet
2280-160230	5905061073312	230 mm	22,23 mm	induction welded	corrugated, continuous	10 mm	1,8 mm	soft	dry/wet

Segmented edge

Weld selection and quality of diamond grain make the wheel a universal tool for granite, natural stone, terrazzo and other stone-based material cutting. 10-millimeters high segment increases wheel life and guarantees fast work progress. Laser welded segment is a guarantee of wheel usability even in reinforced concrete works.



INDEX NUMBER	EAN	Diameter	Spindle hole	Mode of segment connection	Edge Typee	Number of segments	Segment height	Segment width	Weld hardness	Purpose
2280-180125	5905061073190	125 mm	22,23 mm	laser welded	segmented	9	10 mm	2,5 mm	medium soft	dry / wet
2280-180230	5905061073206	230 mm	22,23 mm	laser welded	segmented	16	10 mm	2,5 mm	medium soft	dry / wet

Diamond wheels for concrete, reinforced concrete, hard bricks, clinker, hard rooftiles, granite.

Segmented turbo edge

Weld selection and quality of diamond grain make the tool a perfect match for concrete and reinforced concrete cutting. 12-millimeters high segment increases wheel life and improves its economic parameters. Laser welded segment is a guarantee of wheel usability in reinforced concrete works. Turbo segment enables faster work progress.



INDEX NUMBER	EAN	Diameter	Spindle hole	Mode of segment connection	Edge Typee	Number of segments	Segment height	Segment width	Weld hardness	Wykorzystanie
2280-200125	5905061073213	125 mm	22,23 mm	laser welded	segmented, turbo	10	12 mm	2,5 mm	soft	dry / wet
2280-200230	5905061073220	230 mm	22,23 mm	laser welded	segmented, turbo	15	12 mm	2,5 mm	soft	dry / wet

Continuous turbo edge

Weld hardness has been accurately selected for hard construction material works, turbo edge increases work speed, high quality diamond grain is a guarantee of fast work and high longevity, body with cooling vents increases wheel longevity.



INDEX NUMBER	EAN	Diameter	Spindle hole	Mode of segment connection	Edge Typee	Segment height	Segment width	Weld hardness	Purpose
2280-220125	5905061073237	125 mm	22,23 mm	induction welded	turbo, slanted	10 mm	2,0 mm	soft	dry / wet
2280-220230	5905061073244	230 mm	22,23 mm	induction welded	turbo, slanted	10 mm	2,0 mm	soft	dry / wet

For hard materials grinding: concrete, natural stone, terrazzo Single straight diamond wheels

High quality segments with high diamond grain density and multi-vent body make the wheel suitable for machine equipped with dust suction system.



INDEX NUMBER	EAN	Diameter	Number of segments	Segment height	Purpose
2270-200125	5905061071516	125 mm	10	5 mm	dry / wet
2270-200180	5905061071523	180 mm	12	5 mm	dry / wet

Double diamond cup-Typee grinding wheels

High quality segments with high diamond grain density and multi-vent body make the wheel suitable for machine equipped with dust suction system. Thanks to two rows of segments you can grind more material in the same time.



INDEX NUMBER	EAN	Diameter	Number of segments	Segment height	Purpose
2270-220125	5905061071530	125 mm	19	5 mm	dry / wet
2270-220180	5905061071547	180 mm	24	5 mm	dry / wet

Diamond turbo cup-Typee grinding wheels

High quality segments with high diamond grain density and multi-vent body make the wheel suitable for machine equipped with dust suction system. Highly durable and sure lead wheel.



INDEX NUMBER	EAN	Diameter	Edge Typee	Segment height	Purpose
2270-240125	5905061071554	125 mm	turbo	5 mm	dry / wet
2270-240180	5905061071561	180 mm	turbo	5 mm	dry / wet

Diamond cup-Typee grinding wheels, L segment

High quality segments with high diamond grain density and multi-vent body make the wheel suitable for machine equipped with dust suction system. Sure wheel guiding and maintenance of segmented wheel work speed at the same time, characterised by high durability.



INDEX NUMBER	EAN	Diameter	Number of segments	Segment height	Purpose
2270-260125	5905061071578	125 mm	7	5 mm	dry / wet
2270-260175	5905061071585	175 mm	9	5 mm	dry / wet

ELEVATIONS

The next stage is the elevation work. For the necessary tasks you will surely need a styrofoam cutting tool, mixing and painting units.




ULTRASPRAY 42 PAINTING UNIT 2560-421500

APPLICATION AREAS

Soils, emulsion, acrylic, latex, oil, masonry, anti-corrosive paints, enamels. Large and medium surfaces – facades, corridors, stairwells, steel constructions, rooftops, etc. Exterior and interior paint finishing. Window, door and similar constructions coating finishing.

PRODUCT ADVANTAGES

- High efficiency – greater distance and height work without moving the machine from one place to another.
- Two guns operation possibility.
- Easy service and shorter time required for work preparation and finishing.
- Precise and high quality mechanical elements
- Long and unmatched use.
- Innovative pump construction with SimpleSet™ system – possibility of work where other pumps will not be able to maintain the pressure.
- Container for all basic accessories.
- Machine steering computer displays notifications on the screen in case of any difficulties.

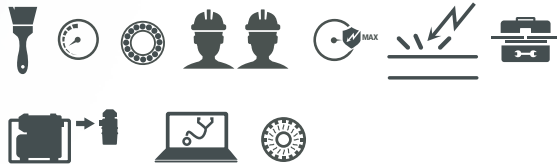

SPECIFICATIONS	
Efficiency	4,2 l/min
Power	1500 W
Max pressure	227 bar
Max nozzle size	0,031"
Max hose length	66 m



RollSpray 33 Airbrush with Paint Roller

Useful extension compatible with majority of paint rollers available on the market as wide as 25 cm. 100 cm long airbrush for high rooms painting.

STYROFOAM CUTTING DEVICE GTC 110-28 2480-112000

SCOPE OF DELIVERY

Styrofoam cutting device, cardboard box, manual, product warranty.

PRODUCT ADVANTAGES

- Light and compact machine with leg assembly possibility – stability and great portability.
- Very simple construction and operation – high reliability, low costs of maintaining machine movement.
- Two-way tilt head with an angle bracket – possibility of cutting at different angles, repeatability of set parameters.



SPECIFICATIONS

Operating voltage	230 V
Maximum cut length	1100 mm
Maximum cut depth	240 mm
Weight	9,9 kg



INDEX NUMBER	EAN	Full product name	Purpose	Features/Benefits
2481-112040	5905061061289	Fuses for GTC 110-24 10 pcs	Set of fuses for unassisted replacement for GTC 110-24	Unassisted replacement of fuses helps you avoid sending the machine to a service desk and enables quick and apt unassisted replacement of a blown fuse for a working one
2481-112072	5905061061296	Cutting wire for GTC 110-24, 20 mb	Replacement wire for GTC 110-24 for hot styrofoam cutting	The wire is easy to mount, allows for quick and clean foam cutting. The cut is clean both for the edges of cut sheets and environment – there are no torn styrofoam pieces
2481-112080	5905061061302	Handle for scaffolding work with GTC 110-24	Handle enabling work with GTC 110-24 on a scaffolding	The handle enables mounting of GTC 110-24 on a scaffolding, enabling work in a direct proximity of the styrofoam sheet mounting place
2481-112081	5905061061319	Aluminium legs for GTC 110-24 for work in an up right position	Leg for mounting with GTC 110-24 enabling work in an up right position	Leg mounting enables for setting GTC 110-24 in a position enabling up right work, which is less strenuous for the operator
2481-112082	5905061061326	Ruler for work with GTC 110-24	Ruler for precise measurement and cutting from an acute angle	Enables checking and recreation of cutting angle and helps in measurement of the styrofoam sheet

HOT KNIFE STYROFOAM CUTTER TERMO-CUT 140 2440-100140

SCOPE OF DELIVERY

Termo-Cut 140 tool, PVC tool case, C-140 blade, wire brush for blade cleaning, manual, product warranty.

PRODUCT ADVANTAGES

- Electric thermo cutter for clean and fast styrofoam sheet cutting of up to 160mm width.
- Tool case delivered.

SPECIFICATIONS

Rated voltage	230 V/50 Hz
Nominal power	110 W
Cutting temperature	500°C
Readiness to cut	after 6-8 seconds
Cut depth	160 mm
Weight	0,9 kg



TERMO-CUT 140 Blades

PRODUCT NAME	NUMBER	
C-140	2441-10 01 40	140 mm
C-160	2441-10 01 60	160 mm
CN- 20	2441-10 00 20	width 20 mm
CR- 20	2441-10 00 21	width 20 mm
CN-26	2441-10 00 26	width 26 mm
D68-61 for cutting holes under junction boxes	2441-10 00 68	max. depth 61 mm



MIXING UNIT GMV 18-2-S 2500-141800

SCOPE OF DELIVERY

Mixing unit with M14 spindle, manual, cardboard box, product warranty, brush set, (2) wrenches for stirrer mounting.

PRODUCT ADVANTAGES

- Compact high power stirrer with a boundary chuck.
- Two gears and rotation regulation – for work with various materials.
- Rotation regulation toggle and switch lock release within the reach of operator's thumbs.
- Durable gear designed precisely for this kind of work.
- Possibility of work with the biggest stirrers of up to 160 mm height.
- Sure and universal stirrer grip with M14 spindle clamp.
- Soft start – increased safety, lower strain to electric grid.
- High quality ball bearings in drive shaft elements – increased machine life.
- Brushes with a fuse – lower risk of commutator damage.
- Sealed gear – increased machine durability.



SPECIFICATIONS

Operating voltage	230 V
Power	1800 W
RPM	0-430 I bieg 0-750 II bieg
Weight	6,5 kg
Recommended stirrer diameter	120-140 mm

TWO-SPINDLE STIRRER GMV 18-2-D 2500-201800

SCOPE OF DELIVERY

Two-spindle stirrer with a safety chuck for stirrers, cardboard box, manual, product warranty, (2) stirrers with a safety chuck.

PRODUCT ADVANTAGES

- Compact high power stirrer with a peripheral chuck.
- Two gears and rotation regulation – for work with various materials.
- Rotation regulation toggle and switch lock release within the reach of operator's thumbs.
- Durable gearbox designed precisely for this kind of work.
- Two stirrers of max. 110 mm length – increased machine work effectiveness.
- Soft start – increased safety, lower strain to electric grid.
- Top quality ball bearings in drive elements – increased machine longevity.
- Brushes with a fuse – lower risk of commutator damage.
- Sealed gear – increased machine durability.



SPECIFICATIONS

Operating voltage	230 V
Power	1800 W
RPM	0-450 gear I 0-790 gear II
Weight	7,4 kg
Recommended spindle diameter	2 x 115 mm

MIXER PADDLES

Powder coated, high quality steel, well-centred – it all describes HARDY paddles recommended for Gröne mixers. High resistance to corrosion and durable welds are a guarantee of effectiveness and user's satisfaction.

Paddles for GMV 18-2-D



INDEX NUMBER	EAN	Diameter	Length
0860-900115	5905061070847	115 mm	600 mm

M14 chuck paddles for adhesive mortars



INDEX NUMBER	EAN	Diameter	Length
0860-830120	5905061067199	120 mm	600 mm
0860-830140	5905061067205	140 mm	600 mm

M14 chuck paddles for cement mortar



INDEX NUMBER	EAN	Diameter	Length
0860-840120	5905061065591	120 mm	600 mm
0860-830140	5905061065607	140 mm	600 mm
0860-840160	5905061065614	160 mm	600 mm

M14 paddle for epoxy grouts



INDEX NUMBER	EAN	Diameter	Length
0860-850120	5905061065997	120 mm	600 mm
0860-850140	5905061066000	140 mm	600 mm

M14 all-purpose paddle



INDEX NUMBER	EAN	Diameter	Length
0860-870130	5905061066017	130 mm	600 mm
0860-870155	5905061066024	155 mm	600 mm





INTERIOR FINISHING

The last, yet the broadest and the most diverse stage of works during which you will install the floor, paint the walls, assemble furniture and install a wash basin in your bathroom. The biggest diversity of work means also a need for a wide range of tools. At this stage you might need all sorts of battery tools, hammer drills, random orbit sanders, wall and ceiling sander with a vacuum cleaner fit for plaster works, painting units or multi tools which are becoming increasingly popular in Poland.

PAINTING UNIT HVLP FINISH 6014 2560-601400

APPLICATION RANGE

Low-pressure turbine for precise work.
Varnishes, wood stains, foundations, enamels, sprayed wallcoverings.

PRODUCT ADVANTAGES

- Manual parameter setting – full stream adjustment control according to your needs.
- Lightweight and compact turbine structure for easy transport and movement during work
- Precise and high quality mechanical elements – long and seamless operation without standstills.



SPECIFICATIONS

Efficiency	2800 l/min
Power	1400 W
Maximum pressure	0,41 bar
Max. size of the nozzle	from 0,8 mm to 2,5 mm
Max. length of hose	6 m



PAINTING UNIT EASYSPRAY 19 2560-210702

APPLICATION RANGE

Soils, emulsion, acrylic, latex, enamel, oil paints, large and medium surfaces – corridors, stairwells, steel constructions, etc.
Painting interior finishing, varnish finishing on windows, doors and similar constructions.

PRODUCT ADVANTAGES

- Simple construction – easy to use and shorter preparation and finishing work time.
- Precise mechanical elements – long and seamless operation without standstills.
- Innovative pump construction with SimpleSet™ system – possibility of further work when other pumps will not be able to maintain the pressure.
- Machine control unit will display error notifications on the screen.
- SuperSafe™ System – oversees the safety, prevents sudden voltage fluctuation.



SPECIFICATIONS

Flow rate	1,9 l/min
Power	700 W
Max pressure	207 bar
Max tip size	0,021"
Max hose length	16,5 m
Unit without a hose and a gun	2560-210700



PAINTING UNIT SMARTSPRAY 21 LF 2560-241000

APPLICATION RANGE

Soils, emulsion, acrylic, latex, enamel, oil paints. Large and medium surfaces – corridors, stairwells, steel constructions, etc.
Painting interiors finishing.
Varnish finishing on windows, doors and similar constructions.

PRODUCT ADVANTAGES

- Simple construction - easy to use and shorter preparation and finishing work time.
- Precise mechanical elements – long and seamless operation without standstills.
- Innovative pump construction with SimpleSet™ system – possibility of further work when other pumps will not be able to maintain the pressure.
- Machine control unit will display error notifications on the screen.
- SuperSafe™ System – oversees the safety, prevents sudden voltage fluctuation.



SPECIFICATIONS

Flow rate	2,1 l/min
Power	1000 W
Max pressure	207 bar
Max tip size	0,021"
Max hose length	24 m

PAINTING UNIT SMARTSPRAY 21 2560-261000

APPLICATION RANGE

Soils, emulsion, acrylic, latex, enamel, oil paints. Large and medium surfaces – corridors, stairwells, steel constructions, etc.
Painting interiors finishing.
Varnish finishing on windows, doors and similar constructions.

PRODUCT ADVANTAGES

- Simple construction - easy to use and shorter preparation and finishing work time.
- Precise mechanical elements – long and seamless operation without standstills.
- Innovative pump construction with SimpleSet™ system – possibility of further work when other pumps will not be able to maintain the pressure.
- Machine control unit will display error notifications on the screen.
- SuperSafe™ System – oversees the safety, prevents sudden voltage fluctuation.



SPECIFICATIONS

Flow rate	2,1 l/min
Power	1000 W
Max pressure	207 bar
Max tip size	0,021"
Max hose length	24 m

PAINTING UNIT SMARTSPRAY 27 2560-281300

APPLICATION RANGE

oils, emulsion, acrylic, latex, enamel, oil, masonry, anti-corrosive paint.
Large and medium surfaces – facades, corridors, stairwells, steel constructions, rooftops, etc.
Exterior and interior painting finishing.
Varnish finishing on windows, doors and similar constructions.

PRODUCT ADVANTAGES

- Simple construction - easy to use and shorter preparation and finishing work time.
- Precise mechanical elements – long and seamless operation without standstills.
- Innovative pump construction with SimpleSet™ system – possibility of further work when other pumps will not be able to maintain the pressure.
- Machine control unit will display error notifications on the screen.
- SuperSafe™ System – oversees the safety, prevents sudden voltage fluctuation.



SPECIFICATIONS	
Flow rate	2,7 l/min
Power	1300 W
Max pressure	207 bar
Max tip size	0,025"
Max hose length	33 m

PAINTING UNIT POWERSPRAY 64 2560-641800

APPLICATION RANGE

Soils, emulsion, acrylic, latex, enamel, oil, masonry and anti-corrosive paints, polyurethans, fireproof layers, ready-made joint compounds, large and medium surfaces – facades, corridors, stairwells, steel constructions, rooftops, etc.
Interior and exterior painting finishing
Varnish finishing on windows, doors and similar constructions.

PRODUCT ADVANTAGES

- Also for liquid material application.
- High efficiency – you can work at a bigger distance and height without moving the machine from one place.
- Option for use of both guns at the same time.
- Simple construction – easy to use and shorter preparation and finishing time .
- Precise mechanical elements – long and seamless operation without standstills.
- Innovative pump construction with SimpleSet™ system – possibility of further work when other pumps will not be able to maintain the pressure.
- Big container for all basic accessories.
- Machine control unit will display error notifications on the screen.



SPECIFICATIONS	
Flow rate	6,4 l/min
Power	1800 W
Max pressure	227 bar
Max tip size	0,039"
Max hose length	99 m


DRILL DRIVER GD 10 LI 2602-081210

SCOPE OF DELIVERY

12 V Drill Driver, PVC tool case, 1.5 Ah 12 V Li-Ion Battery, charger, manual, product warranty.

PRODUCT ADVANTAGES

- Light and handy gun drill driver for assembly and finishing work.
- Designed for furniture assembly, light element installation or small diameter hole drilling in majority of construction materials.
- Only 1 kg weight with battery.
- Keyless chuck for easy operating tool replacement.
- Integrated battery life indicator on the machine.

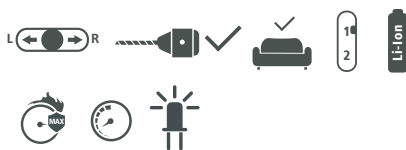

SPECIFICATIONS

Peak torque	12 V
RPM	20 Nm
Range of drill bit diameters for the chuck	gear I: 0-400 gear II: 0-1400
Weight with battery	1,5-10 mm
Waga z baterią	1 kg




DRILL DRIVER GD 18 LI 2602-101810

SCOPE OF DELIVERY

18 V Drill Driver, PVC tool case, 1.5 Ah 18 V Li-Ion Battery, charger, manual, product warranty, belt clip.

PRODUCT ADVANTAGES

- Light and handy tool for majority of assembly and finishing works.
- Both for drilling and driving in various construction materials.
- Compact construction and small weight – sureness of work even in hard to reach places.
- Tightening force optimally adjusted to its (designed) purpose – compromise between the weight and power of the tool.
- Only 1.3 kg weight with battery.
- Keyless chuck for easy operating tool replacement.
- Integrated battery life indicator.

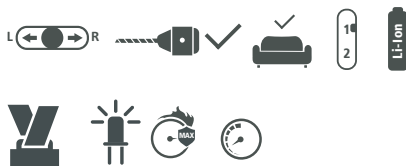

SPECIFICATIONS

Operating voltage	18 V
Charging voltage	18 V
Peak torque	30 Nm
RPM	gear I: 0-400 gear II: 0-1400
Range of drill bit diameters for the chuck	1,5-10 mm
Weight with battery	1,3 kg



DRILL DRIVER GD 18 XL 2602-231813

SCOPE OF DELIVERY

18 V Drill Driver, PVC tool case, 2 x 3.0 Ah Li-Ion Battery, charger, manual, product warranty, belt clip.

PRODUCT ADVANTAGES

- Powerful motors with high load capacity – work in extreme conditions without the risk of overloading.
- Thermal motor protection – additional line of overloading protection.
- Diode lighting the working space – for work with insufficient lighting.
- Ergonomic, compact casing – handiness, lesser fatigue of the operator.
- High torque – possible to work with big drill bits and materials hard for processing, increased application flexibility on machines.



SPECIFICATIONS	
Operating voltage	18 V
Charging voltage	18 V
Peak torque	45 Nm
RPM	gear I: 0-340 gear II: 0-1220
Range of drill bit diameters for the chuck	1,5-13 mm
Weight with battery	2,0 kg


HAMMER DRILL DRIVER GID 18 XL 2604-241813

SCOPE OF DELIVERY

18V impact drill-driver, 2x3,0Ah, charger, case, belt hook, manual, warranty card

PRODUCT ADVANTAGES

- Powerful engines, high load capacity – working in difficult conditions without fear of overload.
- Motor thermal protection – an extra line of defense against overloads.
- LED illuminates workspace allows you to work in low-light conditions.
- The ergonomic, compact design – the machine despite the greater weight is comfortable to hold without causing too much fatigue.
- High torque allows you to work with large screws and heavy – to-process materials, increase flexibility of application.
- Mechanical impact increases range of applications of the machine.
- High frequency impact improves efficiency of work.

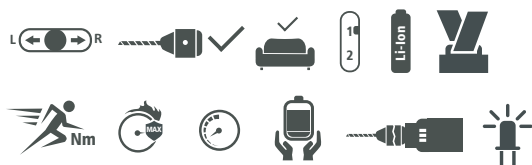

SPECIFICATIONS	
Operating voltage	18 V
Charging voltage	18 V
Peak	45 Nm
RPM	gear I: 0-340 gear II: 0-1220
Range of drill bit diameters for the chuck	1,5-13 mm
Impact rate gear I/II	4560/16560/min
Weight with battery	2,0 kg


DRYWALL SCREWDRIVER GSD 18 XL 2610-221800

SCOPE OF DELIVERY

18 V Drywall screwdriver, PVC tool case, 2 x 3.0 Ah Li-Ion battery, manual, product warranty, charger, PH 2 screwdriver bit, belt clip.

PRODUCT ADVANTAGES

- Drywall screwdriver – quick and easy work with plaster-cardboard panels.
- Front clutch - precise, repeatable regulation of screw driving depth.
- Thermal motor protection – additional protection line against overloading.
- Diode lighting the working space – for work with insufficient lighting.
- Ergonomic, compact casing – handiness, lesser fatigue of the operator.
- Metal gear with a clutch – durability and high load capacity of the tool.

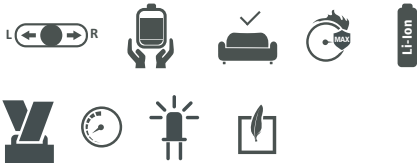

SPECIFICATIONS

Operating voltage	18 V
Charging voltage	18 V
Peak torque	11 Nm
RPM	1600 rev./min
Recommended screw length	16-55 mm
Weight with battery	1,84 kg



CORDLESS ANGLE GRINDER GAGB 18-125 P 2624-251800

SCOPE OF DELIVERY

18 V cordless angle grinder, PVC tool case, 2 x 3.0 Ah Li-Ion Battery, charger, manual, product warranty, pin wrench.

PRODUCT ADVANTAGES

- Ergonomic shape, rubber casing – sure, comfortable grip, easy, handy work.
- 4-pole motor – higher power, bigger load capacity.
- Dead-man's valve – improved operator's safety.
- Motor protection against overloading – increased tool longevity.
- Helical gear – quieter work under a bigger load.
- Light alloy gear casing – higher durability and better heat rejection.
- Drive shaft elements on ball bearings – higher durability under a bigger load.



SPECIFICATIONS

Operating voltage	18 V
Spindle chuck	M15
Idling speed	7000 rot./min
Disc diameter	125 mm
Weight	2,28 kg



CORDLESS CAULK/ ADHESIVE GUN GIN 7-310 F 2658-100250

SCOPE OF DELIVERY

7.4 V caulk/adhesive gun, PVC tool case, 1.5 Ah Li-Ion Battery, manual, product warranty, charger.

PRODUCT ADVANTAGES

- Light and handy tool for automatised silicone caulk, gypsum putty, etc. application.
- Battery-powered – effortless application, maximum portability.
- Rods for cartridges.
- Flow rate regulation – adjust working method of the tool to the mass density.



SPECIFICATIONS

Operating voltage	7,4 V
Barrel diameter	50 mm
Cartridge volume	310 ml
Maximum pressure	3000 N
Flow rate	6,9 mm/s
Weight	1,4 kg



CORDLESS CAULK/ ADHESIVE GUN GIN 7-310 T 2658-200235

SCOPE OF DELIVERY

7.4 V cordless caulk/adhesive gun, PVC tool case, 1.5 Ah Li-Ion Battery, manual, product warranty, charger.

PRODUCT ADVANTAGES

- Light and handy tool for automatised silicone caulk, gypsum putty, etc. application.
- Battery-powered – effortless application, maximum portability.
- Caulk Sausages Barrels.
- Flow rate regulation – working method adjustment to the mass density.



SPECIFICATIONS

Operating voltage	7,4 V
Barrel diameter	50 mm
Cartridge volume	310 ml
Maximum pressure	3000 N
Flow rate	6,9 mm/s
Weight	1,35 kg




CORDLESS CAULK/ADHESIVE GUN GIN 7-600 T 2658-200375

SCOPE OF DELIVERY

7.4 V caulk/adhesive gun, PVC tool case, 1.5 Ah Li-Ion battery, manual, product warranty, charger.

PRODUCT ADVANTAGES

- Light and handy tool for automatised silicone caulk, gypsum putty, etc. application.
- Battery-powered – effortless application, maximum portability.
- Caulk Sausages Barrels – flexible usage
- Flow rate regulation – adjust working method of the tool to the mass density.

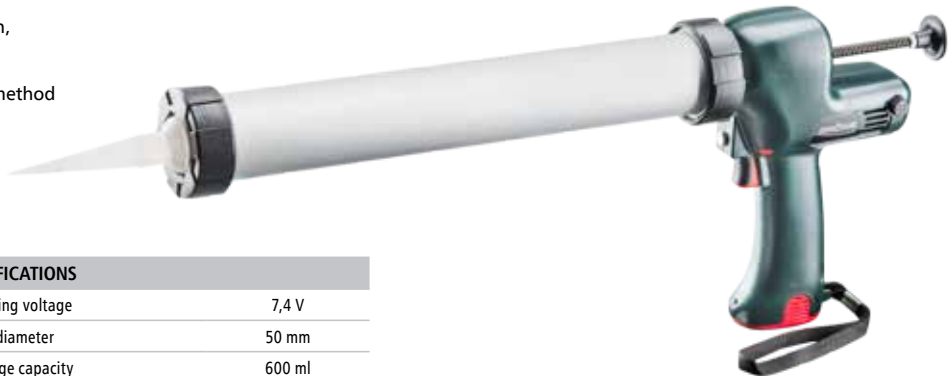

SPECIFICATIONS	
Operating voltage	7,4 V
Barrel diameter	50 mm
Cartridge capacity	600 ml
Maximum pressure	3000 N
Flow rate	6,9 mm/s
Weight	1,45 kg

Batteries and chargers for battery driven devices Li series

Battery



INDEX NUMBER	Product name	Operating voltage [V]	Capacity [Ah]
2603-080001	GB 1015	12	1,5

Charger

INDEX NUMBER	Product name	Battery voltage [V]	Charging current [A]
2603-080010	GCH 1012-15	12	3

Battery



INDEX NUMBER	Product name	Operating voltage [V]	Capacity [Ah]
2603-100001	GB 1815	18	1,5

Charger

INDEX NUMBER	Product name	Battery voltage [V]	Charging current [A]
2603-100010	GCH 18-15	18	3

Batteries and chargers for battery driven devices XL series

Battery



INDEX NUMBER	Product name	Operating voltage [V]	Capacity [Ah]
2603-230001	GB 1830	18	3

Charger

INDEX NUMBER	Product name	Battery voltage [V]	Charging current [A]
2603-230010	GCH 18-30	18	2,4

Batteries and chargers for battery driven caulk and adhesives guns

Battery



INDEX NUMBER	Product name	Operating voltage [V]	Capacity [Ah]
2659-100010	GCH 72-15	7,2	1,5

Charger

INDEX NUMBER	Product name	Battery voltage [V]	Charging current [A]
2659-100001	GB 7215	7,2	0,4

Take a closer look at available equipment at the end of *Interior finishing* section.


HAMMER DRILL GIDV 720 RL 2504-240720

SCOPE OF DELIVERY

Impact drill, PVC tool case, keyless chuck, auxiliary handle with drilling depth limiter, manual, product warranty, brush set.

PRODUCT ADVANTAGES

- 720 W power – high power reserve for heavy duty drilling work.
- Possibility of working with or without impact, high impact rate – the tool can be used even in most extreme works requiring high efficiency.
- Rotation regulation – possibility of work with various materials.
- Keyless chuck – quick operating tool replacement without using additional wrenches.
- Brass brush-holders, drive elements on ball bearings – increased tool longevity.

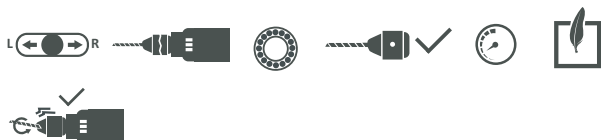

SPECIFICATIONS

Operating voltage	230 V
Power	720 W
RPM	0-2700 obr. / min
Impact rate	0-43000
Range of drill bit diameters for the chuck	1,5-13 mm
Maximum drilling diameter for materials	Steel: 10 mm Concrete: 16 mm Wood: 25 mm
Weight	3 kg


HAMMER DRILL GIDV 1100 RL 2504-231150

SCOPE OF DELIVERY

Impact drill, PVC tool case, keyed chuck with a key, auxiliary handle with drilling depth limiter, manual, product warranty, brush set.

PRODUCT ADVANTAGES

- 1150 W – power reserve for the most extreme application.
- Two gears – wider application possibilities.
- Work with or without mechanical impact, high impact frequency – possibility of tool application in the most extreme works requiring high efficiency.
- Rotation regulation – possibility of work with various materials.
- Big work mode switch, no tool required for auxiliary handle use with the drilling depth limiter – easy to use even in work gloves.
- Keyed chuck – surety and stability of grip even in the hardest applications.
- Brass brush-holders, drive elements in ball bearings – higher tool longevity.

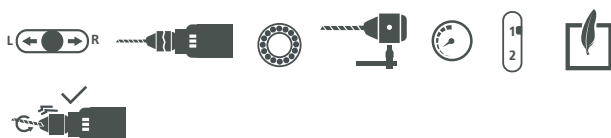

SPECIFICATIONS

Operating voltage	230 V
Power	1150 W
RPM	I bieg: 1000 II bieg: 2900
Impact rate	0-46400
Maximum drilling diameter for materials	Steel: 13 mm Concrete: 20 mm Wood: 30 mm
Weight	4,28 kg

OSCILATING SANDER GOG 200 2514-140105

SCOPE OF DELIVERY

Sander, manual, product warranty, brush set, sanding paper sheet, sanding pad safety lock – hole punch.

PRODUCT ADVANTAGES

- Lightweight and handy random orbit sander for works requiring high quality surface finishing.
- Compact size and effective deposit removal – guarantee of good work results.
- Metal ventilator and brush-holders – increased tool life.
- Sanding pads on rubber shock absorbers – better work effects, less vibration, lower wear level and lesser operator fatigue.
- Drive elements on ball bearings – increased tool longevity.



SPECIFICATIONS

Operating voltage	230 V
Power	210 W
Sanding pad measurements	115 x 105 to 115 x 145 mm
OPM	12 000/min
Weight	1,4 kg



OSCILATING SANDER GOG 300 2514-160185

SCOPE OF DELIVERY

Sander, manual, product warranty, brush set, sanding paper sheet, sanding pad safety lock – hole punch.



SPECIFICATIONS

Operating voltage	230 V
Power	300 W
Sanding pad measurements	185 x 95 to 225 x 95 mm
OPM	13 000/min
Weight	2 kg

Sanding pad with velcro mounting for GOG 300

INDEX NUMBER	EAN	Length	Width
2515-160001	5905061069056	185 mm	90 mm



PRODUCT ADVANTAGES

- Powerful 300 Watt random orbit sander for professional use.
- Special handle and casing construction – possibility of sanding near the edge of material even near walls and corners.
- Effective deposit removal and durable aluminium groundplate – increased tool quality.
- Drive shaft elements on high quality NSK bearings – increased tool life and durability.
- Switch rubber sealing – improved durability in contact with dust.
- Pad on rubber shock absorbers in o-rings – better effects, reduced vibration, lower wear level and reduced operator fatigue.



MULTITOOL GMT 92 2544-920400

SCOPE OF DELIVERY

Equipment set: delta sanding pad, P60 sanding paper sheet, blade, scraper, clamp screw, brush set, PVC tool case, manual, product warranty.

PRODUCT ADVANTAGES

- High power – 400 W, power reserve for big load.
- Compact handle covered with anti-slip polymer – increased ergonomics, lesser fatigue.
- Intuitive operating tool mounting system.
- Basic equipment set included in the delivery – possibility of immediate work start.
- Equipment mounting system – possibility of work with every equipment for all tools of this type available on the market.
- Drive shaft elements on ball bearings – increased life of power transmission system.



SPECIFICATIONS

Operating voltage	230 V
Power	400 W
OPM	15 000-22 000
Sanding paper size	93 x 93 x 93 mm
Weight	1,5 kg

Scraper for GMT 92



INDEX NUMBER	EAN	Features/Benefits	Width
2545-920501	5905061068912	Long life hard metal scraper. Enables scraping of old layers with GMT 92	35 mm

HSS Blade for GMT 92



INDEX NUMBER	EAN	Features/Benefits	Width
2545-920502	5905061068929	HSS blade for cutting all types of material	35 mm

Triangular sanding pad for GMT 92



INDEX NUMBER	EAN	Features/Benefits	Width
2545-920503	5905061068936	Triangular sanding pad for velcro sanding paper mounting	93 x 93 x 93 mm

PRECISION CIRCULAR SAW GPC 6-89 GL 2536-760600

SCOPE OF DELIVERY

Cutter, laser pointer, attachment for vacuum cleaner connection, saw blade set: diamond with continuous rim, diamond segmented rim, circular saw blade, crosscut blade, PVC tool case, hex key, manual, product warranty.

PRODUCT ADVANTAGES

- Precise cutter based on 600 W angle grinder.
- Small working diameters of equipment – precise work while using relatively little power.
- Rotations adjusted to work with ceramics, wood and metal.
- Laser pointer – very precise straight line cuts.
- Guide bars for comfortable work with long straight line cuts.
- Equipped with basic equipment enabling work with a wide range of building materials.



SPECIFICATIONS

Operating voltage	230 V
Power	600 W
RPM	5500 rev./min
Maximum operating tool diameter	89 mm
Maximum cutting depth	Wood: 28,5 mm Ceramics: 8 mm Aluminium: 3 mm
Weight	2,3 kg



Blades available with the tool set.

Three 42 cm aluminium guide bars set with clamps and connectors for GPC 6-89 GL

Support straight line work on large surfaces.

Small, compact guide bars enabling straight line work in small spaces.
Connection of guide bars with a connector allows user to extend the guide bar infinitely.



INDEX NUMBER	EAN	Length
2537-760601	5905061067915	42 cm

125 cm aluminium guide bar for GPC 6-89 GL

Supports straight line work on large surfaces

Long guide bar facilitates straight line cutting work.
Connection of guide bars with a connector allows user to extend the guide bar infinitely.



INDEX NUMBER	EAN	Length
2537-760602	5905061067922	125 cm

ELECTRIC STAPLE GUN GST 10-16 2552-711112

SCOPE OF DELIVERY

Stapler, tool case, staples, manual, product warranty.

PRODUCT ADVANTAGES

Maximum staple width: 11.4 mm
Maximum staple height: 16.0 mm
Staple wire thickness: 1.2 mm

Maximum nail width: 2.0 mm
Maximum nail height: 16.0 mm
Nail wire thickness: 1.25 mm

- Small and handy electric tool for stapling and nailing.
- Lightweight, handy, simply constructed tool with low failure rate.
- Ergonomic casing shape and trigger placement.

SPECIFICATIONS

Rated voltage	230 V
Stapling speed	20/min
Nail length	10-16 mm
Staple wire thickness	1,2 mm
Staple length	10-16 mm
Staple width	11,4 mm
Weight	0,8 kg



ELECTRIC STAPLE GUN GST 15-25 2552-820812

SCOPE OF DELIVERY

Stapler, tool case, staples, manual, product warranty.

PRODUCT ADVANTAGES

Maximum staple width: 6.0 mm
Maximum staple height: 25.0 mm
Staple wire thickness: 1.2 mm

Maximum nail width: 2.0 mm
Maximum nail height: 32.0 mm
Nail wire thickness: 1.25 mm

- Small and handy electric tool for stapling and nailing.
- Lightweight, handy, simply constructed tool with low failure rate.
- Ergonomic casing shape with rubber for sure grip and trigger placement.

SPECIFICATIONS

Rated voltage	230 V
Stapling speed	30/min
Nail length	15-32 mm
Staple wire thickness	1,2 mm
Staple length	15-25 mm
Staple width	6 mm
Weight	1,3 kg



GLUE GUN GGL 50-20 2550-100040

PRODUCT ADVANTAGES

- Lightweight, handy, simply constructed tool with low failure rate.
- Works with 11 mm diameter hot melt glue sticks.
- Efficiency - 20 g of glue per minute.
- Handy, long trigger – increased ergonomics and reduced arm fatigue.

SPECIFICATIONS

Rated voltage	230 V
Power	50 W
Melt flow index	20 g/min
Glue stick diameter	11 mm
Weight	0,3 kg



GLUE GUN GGL 200-25 2550-200200

PRODUCT ADVANTAGES

- Lightweight, handy, simply constructed tool with low failure rate.
- Works with 11 mm diameter hot melt glue sticks.
- Efficiency - 25 g of glue per minute.
- Handy, long trigger – increased ergonomics and reduced arm fatigue.
- Equipped with a set of support stand for comfortable and safe gun placement when put away between tasks.

SPECIFICATIONS

Rated voltage	230 V
Power	200 W
Melt flow index	25 g/min
Glue stick diameter	11 mm
Weight	0,48 kg



HEAT GUN GOV 20-600 2548-122000

SCOPE OF DELIVERY

Heat Gun, PVC tool case, manual, product warranty, nozzles: wide and narrow.

PRODUCT ADVANTAGES

- Handy heat gun of high power with air flow regulation.
- Stepless adjustment of exhaust temperature – possibility of tool parameters adjustment for a given task.
- Possibility of air heating up to 600°C – market leader.
- Equipped in thermal overheating protection.
- Ceramic heater – increased tool life.



SPECIFICATIONS	
Operating voltage	230 V
Power	2000 W
Air exhaust temperature	gear I: 50-450°C gear II: 90-600°C
Thermal protection	yes
Air flow	gear I: 250 l/min gear II: 500 l/min
Weight	0,75 kg



DRYWALL SANDER GWG 7-225 RB 2512-230650

SCOPE OF DELIVERY

Drywall sander, PVC tool case, (5) 225 mm diameter perforated sanding sheet, manual, product warranty.

PRODUCT ADVANTAGES

- Four degrees of sanding disc looseness.
- Head-mounted motor, no flexible shaft grinder – reduced failure rate.
- Regulated pole – work comfort in all conditions, wide range.
- Straight angle head lock option – comfortable work with walls on large surfaces.
- Integration with a vacuum cleaner – possibility of disc suction power regulation and reacting to various hardness of worked material.
- Aluminium gearbox casing – increased durability and improved heat dissipation from the gear.
- Well sealed gearbox – increased resistance to aggressive dust generated in the course of work.
- Well protected motor against aggressive dust – increased tool life.
- Detachable wheel wire brush – access to corners.



SPECIFICATIONS	
Operating voltage	230 V
Power	650 W
Sanding pad size	225 mm
Pole length	1200-1700 mm
Idle speed	0-1200 rev. /min
Weight	3,5 kg



VACUUM CLEANER GVCV 12-25-32 2556-880025

SCOPE OF DELIVERY

Vacuum cleaner, Ø32 mm hose, filter set, manual, product warranty, cardboard box.

PRODUCT ADVANTAGES

- Industrial class vacuum cleaner suited for work with power tools in dry and wet mode.
- Pressure force regulation – effective work with plaster sanders, i.e. giraffes.
- Possibility of connection of a tool of power of up to 2200 W, automatised tool connection – easier, more comfortable tool work mode.
- Work without adapters in 32 mm equipment system.
- Automatic or manual mode of filter cleaning.
- Two turbine motor – reduced failure rate, improved suction.
- Perfect for work with fine dust such as plaster.



SPECIFICATIONS

Operating voltage	230 V
Power	1200 W
Maximum load of auxiliary socket	2200 W
Soft start	yes
Sealed suction	250 mbar
Air flow rate	66 l/s
Hose connector diameter	32 mm
Weight	14,7 kg
Net capacity	25 l



INDEX NUMBER	Product name	EAN	Full product name	Purpose	Features/Benefits	Diameter
	2557-880001 4m hose for GVCV 12-25-32	5905061072865	4 m, Ø32 mm hose for GVCV 12-25-32	Vacuum cleaner hose for work with 32 mm system vacuum cleaners	Compatible with all vacuum cleaners working with nozzles and in 32 mm system	32 mm
	2557-880002 Main filter for GVCV 12-25-32 2 pcs./set	5905061072872	Main filter for GVCV 12-25-32, fleece, fluted	Initial filter for GVCV 12-25-32 vacuum cleaner	Filter suitable for multiple cleaning – lower operation costs	
	2557-880003 Telescopic tube for GVCV 12-25-32	5905061072889	Telescopic tube for GVCV 12-25-32	32 mm diameter connector telescopic tube for connecting hose with nozzle	Telescopic tube thanks to range regulation can be adjusted to operator's height	32 mm
	2557-880004 GVCV 12-25-32 Crevice nozzle	5905061072896	Crevice nozzle for GVCV 12-25-32	Crevice nozzle with 32 mm connector for sucking from tight spaces	Easy work in tight spaces	32 mm
	2557-880005 GVCV 12-25-32 Floorhead	5905061072902	Wide nozzle for floors for GVCV 12-25-32	Wide nozzle with 32 mm connector for large flat surfaces work	Effective work on large surfaces	32 mm
	2557-880006 GVCV 12-25-32 Round Brush	5905061072919	Round Brush for GVCV 12-25-32	Round Brush with 32 mm connector for work with delicate surfaces	Safe and effective work with delicate surfaces	32 mm
	2557-880007 GVCV 12-25-32 32 mm handle	5905061072926	Ø32 mm hose handle for GVCV 12-25-32	32 mm system hose handle for connection between telescopic tube and hose	Increases ergonomics of working with a vacuum cleaner	32 mm
	2557-880008 GVCV 12-25-32 Membrane Filter	5905061072933	Membrane Filter for GVCV 12-25-32	Membrane Filter for Vacuum Dust compartment	Increases vacuum cleaner tightness and longevity	
	2557-880009 GVC 10-15-35 Dustbag with velcro	5905061072940	Polyester reusable dustbag for GVCV 12-25-32	Reusable dustbag	Reusability increases economic work effectiveness after cleaning/washing, Velcro for easy mounting and emptying	
	2557-880010 GVCV 12-25-32 Paper Dustbag	5905061072957	Paper Dustbag for GVCV 12-25-32	Non-reusable paper dustbag	Economical paper dustbag for dry dust	
	2557-880011 GVCV 12-25-32 Wet filter 2 pcs.	5905061072964	Sponge filter for wet work with GVCV 12-25-32	Preliminary filter for wet work with GVCV 12-25-32	Preliminary filter for wet work helps increase vacuum cleaner tightness and limits the risk of damage	
	2557-880012 GVCV 12-25-32 Rubber Adapter	5905061072513	Rubber Adapter for different hose diameters for GVCV 12-25-32	Adapter for 32 mm system hose connection with other hoses and nozzles in different systems	Adapter helps connect GVCV 12-25-32 with other tools, hoses or nozzles not operating in 32 mm system	32 mm
	2557-880020 GVCV 12-25-32 set: telescopic tube, handle, nozzle	5905061082918	Cleaning set for GVCV 12-25-32: telescopic tube, handle, floorhead	Cleaning set for GVCV 12-25-32	Set for immediate cleaning. Floorhead, telescopic tube, hose handle for quick work and increased ergonomics	32 mm

Take a closer look at available equipment at the end of *Interior finishing* section.



Screwdriver bits set 8 pcs. Bit holder for 60 mm bits



INDEX NUMBER	EAN	Shank	Bit type and size	Length
2209-580008	5905061068943	1/4"	SL6, SL6, PH0, PH1, PH2, PH3	25 mm

Screwdriver bits set 12 pcs.



INDEX NUMBER	EAN	Shank	Bit type and size	Length
2209-580012	5905061068950	1/4"	PH2	25 mm

Screwdriver bits set 12 pcs.



INDEX NUMBER	EAN	Shank	Bit type and size	Length
2209-580312	5905061068974	1/4"	PZ1, PZ2, PZ3	25 mm

Diamond drill bit for grès, vacuum brazed

Highly durable tools for work with the hardest construction materials. Big diamond grain brazed in vacuum increases life, temperature resistance and load capacity. Exceptional durability make the tool the cheapest in hole ratio possibility of drilling in hardest materials.



INDEX NUMBER	EAN	Thread	Diameter
2290-531406	5905061072384	M14 inner thread	6 mm
2290-531408	5905061072391		8 mm
2290-531410	5905061072407		10 mm
2290-531412	5905061072414		12 mm
2290-531420	5905061072421		20 mm
2290-531428	5905061072438		28 mm
2290-531435	5905061072445		35 mm
2290-531443	5905061072452		43 mm
2290-531450	5905061072469		50 mm
2290-531468	5905061072476		68 mm
2290-531475	5905061072483		75 mm

Adapter for crown drill bits for gres for working with a chuck

Enables work with crown drill bits for gres with tools without M14 spindle thread.



INDEX NUMBER	EAN	Chuck	Diameter
2291-541401	5905061072490	HEX	20 mm

Adapter for crown drill bits for gres for working with SDS Plus chuck

Enables work with crown drill bits for gres with tools without M14 spindle thread.



INDEX NUMBER	EAN	Chuck	Diameter
2291-551402	5905061072506	SDS Plus	-

Sanding paper with velcro for GOG 300

Paper for dry and wet work with random orbit sanders. Especially recommended for Gröne GOG 300 Random Orbit Sander. Holes for work with tools with dedusting systems.



INDEX NUMBER	Paper weight	Length	Width	Holes number	Pieces	Grain type	Coat
1034-381804	P40	185 mm	95 mm	8	25	aluminium oxide	semiopen
1034-381806	P60	185 mm	95 mm	8	25	aluminium oxide	semiopen
1034-381808	P80	185 mm	95 mm	8	25	aluminium oxide	semiopen
1034-381812	P120	185 mm	95 mm	8	25	aluminium oxide	semiopen
1034-381818	P180	185 mm	95 mm	8	25	aluminium oxide	semiopen
1034-381904	P40	185 mm	95 mm	8	5	aluminium oxide	semiopen
1034-381906	P60	185 mm	95 mm	8	5	aluminium oxide	semiopen
1034-381808	P80	185 mm	95 mm	8	5	aluminium oxide	semiopen
1034-381912	P120	185 mm	95 mm	8	5	aluminium oxide	semiopen
1034-381918	P180	185 mm	95 mm	8	5	aluminium oxide	semiopen

Sanding paper with velcro for GOG 200

Paper for dry and wet work with random orbit sanders. Especially recommended for Gröne GOG 200 Random Orbit Sander. Holes for work with tools with dedusting systems.



INDEX NUMBER	Paper weight	Length	Width	Holes number	Pieces	Grain type	Coat
1034-381404	P40	115 mm	105 mm	8	25	aluminium oxide	semiopen
1034-381406	P60	115 mm	105 mm	8	25	aluminium oxide	semiopen
1034-381408	P80	115 mm	105 mm	8	25	aluminium oxide	semiopen
1034-381412	P120	115 mm	105 mm	8	25	aluminium oxide	semiopen
1034-381418	P180	115 mm	105 mm	8	25	aluminium oxide	semiopen
1034-381504	P40	115 mm	105 mm	8	5	aluminium oxide	semiopen
1034-381506	P60	115 mm	105 mm	8	5	aluminium oxide	semiopen
1034-381508	P80	115 mm	105 mm	8	5	aluminium oxide	semiopen
1034-381512	P120	115 mm	105 mm	8	5	aluminium oxide	semiopen
1034-381518	P180	115 mm	105 mm	8	5	aluminium oxide	semiopen

Sanding paper with velcro for GMT 92

Paper for dry and wet work with random orbit sanders. Especially recommended for Gröne GMT 92. Holes for work with tools with dedusting systems.



INDEX NUMBER	Paper weight	Dimensions	Holes number	Pieces	Grain type	Coat
1034-381004	P40	96 x 96 x 96 mm	6	25	aluminium oxide	semiopen
1034-381006	P60	96 x 96 x 96 mm	6	25	aluminium oxide	semiopen
1034-381008	P80	96 x 96 x 96 mm	6	25	aluminium oxide	semiopen
1034-381012	P120	96 x 96 x 96 mm	6	25	aluminium oxide	semiopen
1034-381018	P180	96 x 96 x 96 mm	6	25	aluminium oxide	semiopen
1034-381104	P40	96 x 96 x 96 mm	6	5	aluminium oxide	semiopen
1034-381106	P60	96 x 96 x 96 mm	6	5	aluminium oxide	semiopen
1034-381108	P80	96 x 96 x 96 mm	6	5	aluminium oxide	semiopen
1034-381112	P120	96 x 96 x 96 mm	6	5	aluminium oxide	semiopen
1034-381118	P180	96 x 96 x 96 mm	6	5	aluminium oxide	semiopen

Sanding paper with velcro for GWG 7-225 RB

Multihole sanding papers with velcro for walls and ceilings sanders work with 225 mm diameter sanding pad.



INDEX NUMBER	Paper weight	Diameter	Number of holes	Pieces	Grain type	Coat
1051-302206	P60	225 mm	8	25	aluminium oxide	open
1051-302208	P80	225 mm	8	25	aluminium oxide	open
1051-302210	P100	225 mm	8	25	aluminium oxide	open
1051-302212	P120	225 mm	8	25	aluminium oxide	open
1051-302218	P180	225 mm	8	25	aluminium oxide	open
1050-302206	P60	225 mm	8	3	aluminium oxide	open
1050-302208	P80	225 mm	8	3	aluminium oxide	open
1050-302210	P100	225 mm	8	3	aluminium oxide	open
1050-302212	P120	225 mm	8	3	aluminium oxide	open
1050-302218	P180	225 mm	8	3	aluminium oxide	open



1051-382204	P40	225 mm	8	25	aluminium oxide	semiopen
1051-382206	P60	225 mm	8	25	aluminium oxide	semiopen
1051-382208	P80	225 mm	8	25	aluminium oxide	semiopen
1051-382212	P120	225 mm	8	25	aluminium oxide	semiopen
1051-302218	P180	225 mm	8	25	aluminium oxide	semiopen
1050-382204	P40	225 mm	8	5	aluminium oxide	semiopen
1050-382206	P60	225 mm	8	5	aluminium oxide	semiopen
1050-382208	P80	225 mm	8	5	aluminium oxide	semiopen
1050-382212	P120	225 mm	8	5	aluminium oxide	semiopen
1050-382218	P180	225 mm	8	5	aluminium oxide	semiopen

Hammer drill bits for concrete with round shank

hammer drilling in concrete, brick, natural stone, terrazzo and other construction materials

Durable quality steel drill bit designed for hammer work. Spiral construction was designed for optimised deposit removal from construction materials drilling. Head construction speeds up the drilling works progress.



INDEX NUMBER	EAN	Diameter	Operating length	Total length
2204-406100	5905061077990	6 mm	55 mm	100 mm
2204-406150	5905061069827	6 mm	90 mm	150 mm
2204-408120	5905061069834	8 mm	70 mm	120 mm
2204-408150	5905061069841	8 mm	90 mm	150 mm
2204-410120	5905061069858	10 mm	70 mm	120 mm
2204-410150	5905061069865	10 mm	90 mm	150 mm
2204-412150	5905061069872	12 mm	90 mm	150 mm



INDEX NUMBER	EAN	Full product name	Purpose	Features/Benefits	Diameter	Kerf width	Body thickness	Teeth/segments number	Cutting element
2537-760610	5905061067939	Carbide blade for wood cutting for GPC 6-89 GL	Blade for cutting soft wood	Blade from sintered carbides is a guarantee of high longevity and quick cutting. High number of teeth with a given diameter leaves clean kerfs.	89 mm	1,5 mm	1,0 mm	23	TCT
2537-760612	5905061067946	HSS blade for metal cutting for GPC 6-89 GL	Blade for cutting thin elements made of steel, iron and other metals.	Blade from tool steel – good effects of cutting in various wood-plastic composites and non-ferrous metals and plastic	89 mm	1,5 mm	1,0 mm	80	HSS
2537-760614	5905061067953	Segmented diamond blade for GPC 6-89 GL	Multi-purpose segmented diamond blade for rough cuts in semi-hard construction materials	Quick auxiliary cutting in ceramic construction materials	89 mm	1,5 mm	1,0 mm	6	Diamond
2537-760616	5905061067960	Diamond blade with continuous rim for GPC 6-89 GL	Diamond blade with continuous rim for precise cuts in semi-hard construction materials	For clean auxiliary cuts in ceramic construction materials	89 mm	1,5 mm	1,0 mm	-	Diamond

Steel staples 500 pcs.



INDEX NUMBER	EAN	Length	Width	Wire
2553-711108	5905061064631	8 mm	11,4 mm	1,2 mm
2553-711110	5905061064648	10 mm	11,4 mm	1,2 mm
2553-711112	5905061064655	12 mm	11,4 mm	1,2 mm
2553-711114	5905061064662	14 mm	11,4 mm	1,2 mm
2553-820815	5905061064693	15 mm	6 mm	1,2 mm
2553-820820	5905061064709	20 mm	6 mm	1,2 mm
2553-820820	5905061064716	25 mm	6 mm	1,2 mm

Steel nails 1000 pcs.



INDEX NUMBER	EAN	Length	Head	Wire
2553-710010	5905061064679	10 mm	2 mm	1,25 mm
2553-820015	5905061064723	15 mm	2 mm	1,25 mm
2553-820020	5905061064730	20 mm	2 mm	1,25 mm
2553-820025	5905061064686	25 mm	2 mm	1,25 mm

Hot Melt Glue sticks for GGL guns

Use for metal, plastic, fabric, ceramic and wood connection.
Perfect for gluing various elements in toy and decoration manufacturing.

Extra strong



INDEX NUMBER	EAN	Pieces per package	Length	Diameter	Colour
2411-663035	5905061070410	1000 szt.	300 mm	11 mm	White

Extra strong



INDEX NUMBER	EAN	Pieces per package	Length	Diameter	Colour
2411-653035	5905061070403	1000 szt.	300 mm	11 mm	Yellow

Guns



INDEX NUMBER	EAN	Description	Purpose	Maximum pressure
2562-400400	5905061084820	40GX Gun	For airless painting and skimming	400 bar
2562-240248	5905061079239	24GX Gun	For airless painting	248 bar
2562-180248	5905061083595	18GX Line Gun	For airless painting	248 bar
2562-601000	5905061084837	1000 ml HVLP	For high pressure painting	-
2562-600250	5905061084325	250 ml HVLP	For high pressure painting	-

Hoses



INDEX NUMBER	EAN	Description	Purpose	Length	Diameter
2561-260011	5905061084677	Material hose	3/8" whip hose tip	1,5 m	1/4"
2561-260013	5905061084998	Material hose	For painting	7,5 m	1/4"
2561-260014	5905061084684	Material hose	For painting	15 m	1/4"
2561-880010	5905061070816	Material hose	For painting	7,5 m	1/4"
2561-880011	5905061070823	Material hose	For painting	15 m	1/4"
2561-260018	5905061084660	Material hose	For painting and skimming	15 m	3/8"
2561-600006	5905061072766	Air hose	For painting	6 m	3/4"

Filters



INDEX NUMBER	EAN	Opis	Purpose	Number of mesh per 1 cm²
2561-140030	5905061083922	Main Filter	Heavy latex and masonry paints, for SS, US, PS series machines	30
2561-140060	5905061083939	Main Filter	Heavy latex and masonry paints, for SS, US, PS series machines	60
2561-140100	5905061083946	Main Filter	Heavy latex and masonry paints, for SS, US, PS series machines	100
2563-400060	5905061084844	Gun Filter	Emulsion, acrylic and latex paints, for 40GX gun	60
2563-400100	5905061084851	Gun Filter	Oil paints and varnishes, for 40GX gun	100
2563-240060	5905061079253	Gun Filter	Emulsion, acrylic, latex paints, for 24GX, 18GX gun	60
2563-240100	5905061079376	Gun Filter	Oil paints, varnishes, for 24GX, 18GX gun	100
2561-160021	5905061084868	Suction Filter	For ES, SS series machines	20
2561-160042	5905061084875	Suction Filter	For US series machines	20
2561-160064	5905061084806	Suction Filter	For PS series machines	16

Extensions



INDEX NUMBER	EAN	Description	Purpose	Length
2563-910030	5905061083786	30 cm extension	For painting, for all gun models	30 cm
2563-910045	5905061083793	45 cm extension	For painting, for all gun models	45 cm
2563-910060	5905061083809	60 cm extension	For painting, for all gun models	60 cm
2563-910090	5905061083816	90 cm extension	For painting, for all gun models	90 cm
2563-910120	5905061083823	120 cm extension	For painting, for all gun models	120 cm
2563-910001	5905061083731	Rotary head	For all extension models	
2566-330100	5905061083779	33 RollSpray	For reduced powdering painting	
2563-600109	5905061084882	RadiatorKit	HVLP Gun	

GX Nozzles



INDEX NUMBER	EAN	Description
2563-337000	5905061082932	Nozzle cover
2563-337001	5905061083410	Nozzle packer 5-pack
2563-337207	5905061082949	GX207 Spray nozzle
2563-337209	5905061082956	GX209 Spray nozzle
2563-337211	5905061082963	GX211 Spray nozzle
2563-337213	5905061083014	GX213 Spray nozzle
2563-337215	5905061083021	GX215 Spray nozzle
2563-337217	5905061083106	GX217 Spray nozzle
2563-337219	5905061083113	GX219 Spray nozzle
2563-337309	5905061082970	GX309 Spray nozzle
2563-337311	5905061082987	GX311 Spray nozzle
2563-337313	5905061083038	GX313 Spray nozzle
2563-337315	5905061083045	GX315 Spray nozzle
2563-337317	5905061083120	GX317 Spray nozzle
2563-337319	5905061083137	GX319 Spray nozzle
2563-337321	5905061083144	GX321 Spray nozzle
2563-337323	5905061084714	GX323 Spray nozzle
2563-337325	5905061084721	GX325 Spray nozzle
2563-337327	5905061084738	GX327 Spray nozzle
2563-337411	5905061082994	GX411 Spray nozzle
2563-337413	5905061083052	GX327 Spray nozzle
2563-337415	5905061083069	GX415 Spray nozzle
2563-337417	5905061083151	GX417 Spray nozzle
2563-337419	5905061083168	GX419 Spray nozzle
2563-337421	5905061083175	GX421 Spray nozzle
2563-337423	5905061083182	GX423 Spray nozzle
2563-337425	5905061083199	GX425 Spray nozzle
2563-337427	5905061084745	GX427 Spray nozzle
2563-337429	5905061084752	GX429 Spray nozzle
2563-337431	5905061083328	GX431 Spray nozzle
2563-337511	5905061083007	GX511 Spray nozzle
2563-337513	5905061083076	GX513 Spray nozzle
2563-337515	5905061083083	GX515 Spray nozzle
2563-337517	5905061083205	GX517 Spray nozzle
2563-337519	5905061083212	GX519 Spray nozzle
2563-337521	5905061083229	GX521 Spray nozzle
2563-337523	5905061083236	GX523 Spray nozzle
2563-337525	5905061083243	GX525 Spray nozzle
2563-337527	5905061083335	GX527 Spray nozzle
2563-337529	5905061084769	GX529 Spray nozzle
2563-337531	5905061083342	GX531 Spray nozzle
2563-337535	5905061083359	GX535 Spray nozzle
2563-337615	5905061083090	GX615 Spray nozzle
2563-337617	5905061083250	GX617 Spray nozzle
2563-337619	5905061083267	GX619 Spray nozzle
2563-337621	5905061083274	GX621 Spray nozzle
2563-337623	5905061083281	GX623 Spray nozzle
2563-337625	5905061083298	GX625 Spray nozzle
2563-337627	5905061083366	GX627 Spray nozzle
2563-337629	5905061083373	GX629 Spray nozzle
2563-337631	5905061083380	GX631 Spray nozzle
2563-337633	5905061083397	GX633 Spray nozzle
2563-337635	5905061083403	GX635 Spray nozzle
2563-337717	5905061084776	GX717 Spray nozzle
2563-337721	5905061083304	GX721 Spray nozzle
2563-337723	5905061084783	GX723 Spray nozzle
2563-337725	5905061084790	GX725 Spray nozzle
2563-337819	5905061083311	GX819 Spray nozzle

Connectors for hose connection



INDEX NUMBER	EAN	Description	Size
2561-261414	5905061083755	Nipple	1/4" x 1/4"
2561-263838	5905061083762	Nipple	3/8" x 3/8"
2561-261438	5905061084981	Nipple	1/4" x 3/8"
2561-263814	5905061083878	Reduction	1/4" x 3/8"

Containers for ES series unit



INDEX NUMBER	EAN	Capacity
2561-210006	5905061084899	6,2 l
2561-240006	5905061072650	6,2 l
2561-640095	5905061084813	95 l

Operating fluids



INDEX NUMBER	EAN	Description	Purpose	Volume
2561-100100	5905061079215	Piston oil	Increases pump longevity	100 ml
2561-101000	5905061079222	Piston oil	Increases pump longevity	1000 ml
2561-121000	5905061079192	Liquid preservative	Long periods of work standstills, precise material system cleaning	1000 ml
2561-125000	5905061079208	Liquid preservative	Long periods of work standstills, precise material system cleaning	5000 ml

Nozzles with needles for HVLP gun



INDEX NUMBER	EAN	Size
2563-600005	5905061084905	0,5 mm
2563-600008	5905061084912	0,8 mm
2563-600010	5905061084929	1,0 mm
2563-600012	5905061084936	1,2 mm
2563-600013	5905061084943	1,3 mm
2563-600018	5905061084950	1,8 mm
2563-600020	5905061084967	2,0 mm
2563-600025	5905061084974	2,5 mm

MATERIAL															
	207	209	211	213	215	217	219								
		309	311	313	315	317	319	321	323	325					
NOZZLE 2563-337.....			411	413	415	417	419	421	423	425	427	429	431		
			511	513	515	517	519	521	523	525	527	529	531	535	
					615	617	619	621	623	625	627	629	631	633	635
						717	719	721	723	725					
							819								
EasySpray 19															
SmartSray 21, 21LF															
SmartSpray 27															
UltraSpray 42															
PowersSpray 64															

- VARNISHES
- ENAMELS
- URETHANES
- ACRYLICS, EMULSIONS
- LATEX
- HYDROISOLATORS
- FIRE PROTECTION
- GYPSUM PUTTIES FOR HYDRODYNAMIC APPLICATION

